


### FEATURES

- Rohacell®/Carbon fibre sandwich cone for optimized stiffness/damping ratio
- Vented cast aluminum chassis for optimum strength and low compression
- Low damping rubber surround for improved transient response
- Non-conducting fibre glass voice coil former for minimum damping
- Extended copper sleeve on pole piece for low inductance and low distortion
- CCAW voice coil for reduced moving mass
- Long life silver lead wires
- Vented pole piece for reduced compression

### Specs :

Nominal Impedance	4 Ω	Free air resonance, Fs	31.5 Hz
DC resistance, Re	3.1 Ω	Sensitivity (2.83 V / 1 m)	90 dB
Voice coil inductance, Le	0.13 mH	Mechanical Q-factor, Qms	4.32
Effective piston area, Sd	118 cm <sup>2</sup>	Electrical Q-factor, Qes	0.35
Voice coil diameter	35.5 mm	Total Q-factor, Qts	0.32
Voice coil height	16 mm	Moving mass incl.air, Mms	14.2 g
Air gap height	5 mm	Force factor, Bl	5.0 Tm
Linear coil travel (p-p)	11 mm	Equivalent volume, Vas	35.5 liters
Magnetic flux density	1.0 T	Compliance, Cms	1.80 mm/N
Magnet weight	0.54 kg	Mechanical loss, Rms	0.65 kg/s
Net weight	1.56 kg	Rated power handling*	60 W

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

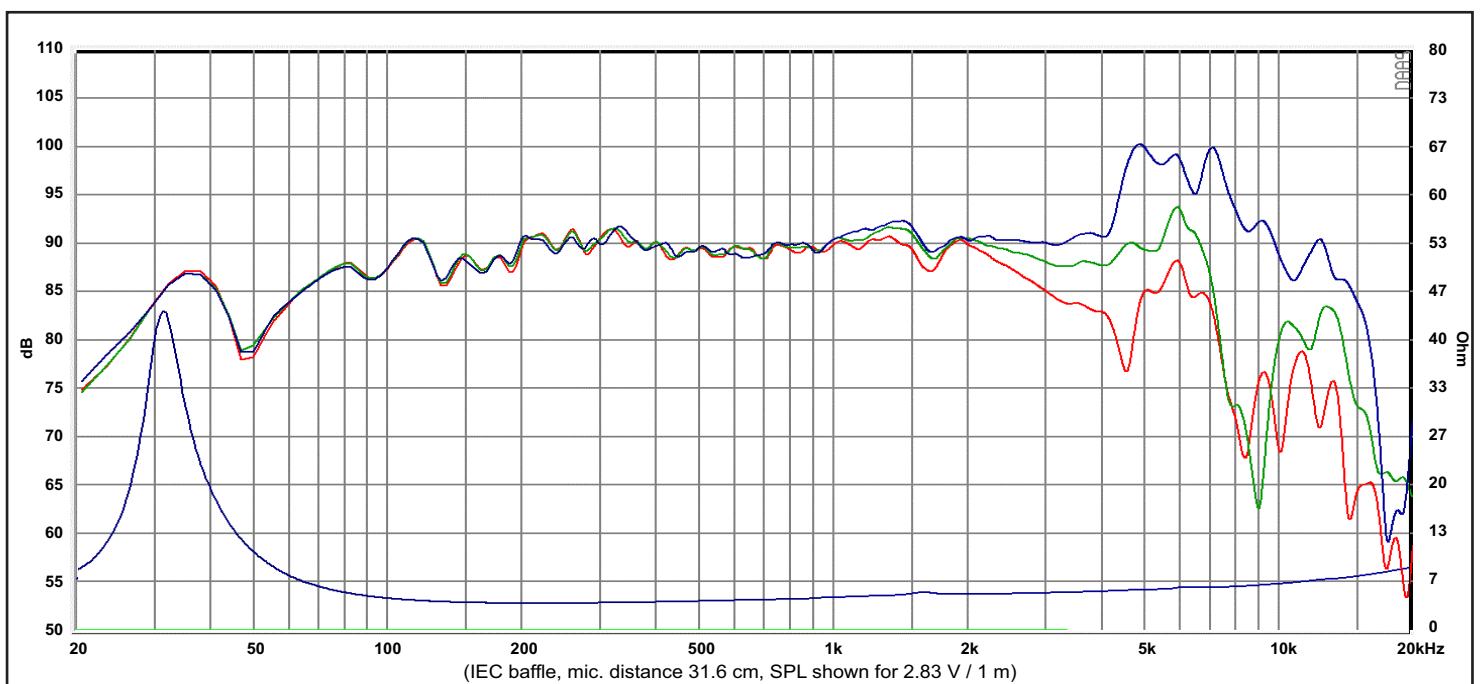

Response Curve :  
 — (Blue) : on axis      — ( Green ) : 30° off-axis      — (Red) : 60° off-axis

REV.3 (02.06.2017)