


MPX-300USB - Stereo Mixer

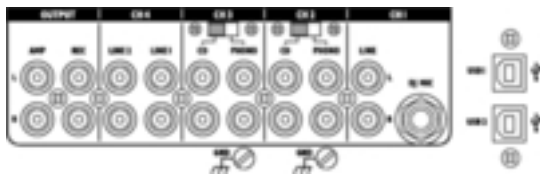

Stereo DJ mixer, with USB interface. Plug and mix!

- Integrated USB audio interface (will be identified and addressed as an external sound card)
- Compatible with USB 1.1
- 4 switchable input channels (2 x USB, 7 stereo inputs, 1 DJ microphone input)
- 2 USB inputs/outputs for the reproduction of digital audio data from a PC as well as for recording mixings or external line/phono sources onto a PC
- Full duplex USB ports (allows for simultaneous recording and reproduction at each port)
- Gain control and 3-way equalizer with cut function for each input channel
- Automatic talkover
- Pre-fader listening (CUE) to the stereo input channels via adjustable headphone output
- Replaceable crossfader for crossfading between 2 input channels
- Especially easy-sliding high-quality faders
- Stereo LED level display

Matching USB connection cable (A plug to B plug) is available at option, e.g. USB-203AB.

Technical data:

Mic input	: 1.5 mV
Phono input	: 3 mV
CD input	: 150 mV
Line input	: 150 mV
Master output	: 1 V/600 Ohm
Record output	: 0.5 V/600 Ohm
Headphones	: ≥ 8 Ohm
Frequency range	: 20-20,000 Hz
THD	: 0.1 %
S/N ratio	: 61 dB, unweighted
Equalizer, bass	: +12 dB, -26 dB/50 Hz
Equalizer, midrange	: +12 dB, -26 dB/1 kHz
Equalizer, treble	: +12 dB, -26 dB/10 kHz
Talkover	: -16 dB
Gooseneck light	: -
Power supply	: viasuppl. plug-in PSU
Admiss. ambient temp.	: 0-40 °C
Dimensions	: 280x266x100 mm
Weight	: 3.3 kg