


MPX-30DMP - Stereo Mixer

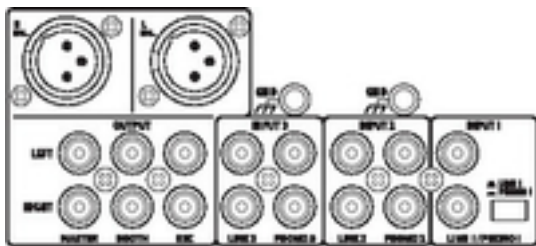

Stereo DJ mixer with integrated MP3 player Mixer:

- 3 input channels (5 stereo ways, 1 DJ microphone way)
- Input channels, each with gain control, 3-way equalizer and cue button, with LED level display of the stereo master
- Talkover function
- Adjustable headphone output with pre-fader listening to the stereo input channels and the master output
- Crossfader with switchable characteristic and reverse switch
- Master output with stereo LED level display
- Additional outputs booth and record

MP3 player with USB interface and SD/MMC card slot:

- USB storage media can be connected directly (e.g. USB flash drive)
- For SD/MMC cards up to 32 GB (FAT 6/FAT 32), available at option

- Alphanumeric display
- Repeat function
- Blue backlit display

Technical data:

Mic input	: 1 mV
Phono input	: 2 mV (phono 1)1 mV (phono 2-3)
CD input	: -
Line input	: 70 mV (line 1)50 mV (line 2-3)
Master output	: 1 V (XLR, bal.)580 mV (RCA, unbal.)
Record output	: 200 mV (tape)500 mV (booth)
Headphones	: ≥ 8 Ohm, stereo
Frequency range	: 20-20,000 Hz
THD	: < 0.15 %
S/N ratio	: > 60 dB, unweighted
Equalizer, bass	: +12 dB, -32 dB/50 Hz
Equalizer, midrange	: +12 dB, -32 dB/1.2 kHz
Equalizer, treble	: +12 dB, -32 dB/10 kHz
Talkover	: -16 dB
Gooseneck light	: -
Power supply	: 230 V~/50 Hz/20 VA
Admiss. ambient temp.	: 0-40 °C
Dimensions	: 245x315x120 mm
Weight	: 3 kg